

15" B/W CCTV Monitor

MM-15 • MM-15A



Features

- ▶ Robust metal cover easy for store up
- ▶ Ergonomics handle design
- ▶ High performance with high resolution more than 1000 TV lines
- ▶ Universal power input AC 100 ~ 240V

MM-15


- ▶ Dual scanning system EIA/CCIR compatible

MM-15A


- ▶ Scanning system for EIA or CCIR compatible
- ▶ Built-in clear and crisp speaker

User control

MM-15




MM-15A




Rear panel


MM-15

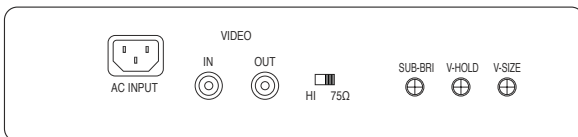

MM-15A

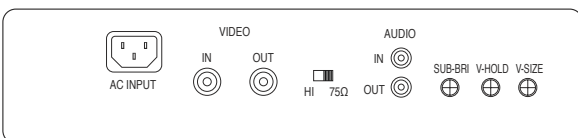

Dimensions

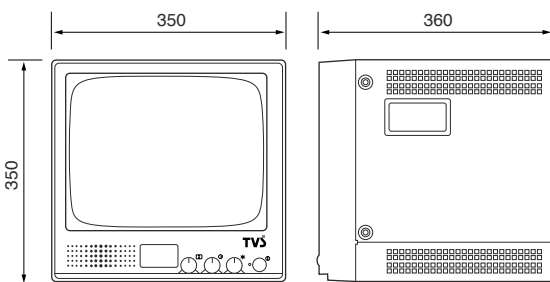

Specification

MODEL	MM-15 / MM-15A
Picture Tube	15" diagonal B/W Flat Square (FS) Tube
Horizontal Resolution	>1000 TV lines (Center)
Scanning Frequency	15.750 KHz / 60 Hz (EIA) 15.625 KHz / 50 Hz (CCIR)
Video Input	Composite video 1.0 Vp-p 75 Ω
Video Connections	Video BNC in x 1 Video BNC out x 1
Audio Connections	MM-15A: RCA in x 1 RCA out x 1
Control	MM-15: Front Power on/off, Brightness, Contrast, V-Size Rear 75 Ω / Hi, V-Hold, Sub-Bri, V-Size
Control	MM-15A: Front Power on/off, Brightness, Contrast, Volume Rear 75 Ω / Hi, V-Hold, Sub-Bri, V-Size
Power Input	AC 100 ~ 240V, 50/60 Hz
Power Consumption	35W max
Dimensions (WxHxD) Packing	455 x 432 x 455 mm
Product	350 x 353 x 360 mm
Weight	Net 12.0 Kgs Gross 13.0 Kgs
Operating Humidity Condition	10% ~ 90%
Operating Temperature Range	-10°C ~ +50°C